

DIRECTIONS FOR USE

- 1) PLACE THE FILTER CARTRIDGE INTO ITS HOUSING ON THE LID.
- 2) FASTEN THE LID WITH THE CARTRIDGE ON THE TRANSPARENT CUP.
- 3) USE THE PIPES SUPPLIED TO CONNECT THE FILTER WITH THE SUPPLY TANK AND THE ENOLMATIC AS INDICATED IN FIG.1. BE CAREFUL TO FOLLOW THE FLOW DIRECTIONS AS INDICATED BY THE ARROWS IN THE PICTURE.
- 4) SWITCH THE ENOLMATIC ON.
- 5) OPEN THE FAUCET ON THE FILTER LID (REF. A) AND PLACE A BOTTLE IN THE ENOLMATIC. IN THIS WAY THE FILTER CUP WILL BE FILLED AUTOMATICALLY AND THE FILTER CARTRIDGE WILL BE IMMERSED IN THE FLUID.
- 6) WHEN THE FLUID FLOWS THROUGH THE SMALL TRANSPARENT HOSE OF THE FILTER LID, **CLOSE** THE FAUCET.

NOW THE FLUID WILL BE FILTERED BY RUNNING THROUGH THE CARTRIDGE.

WHEN THE BOTTLE IS FULL, LIFT THE SUCTION PIPE AND CONTINUE TO FILL BOTTLES UNTIL THE TRANSPARENT FILTER CUP IS EMPTY AGAIN.

REMOVE THE CARTRIDGE AND WASH IT WITH COLD WATER, COUNTER FLOW IF POSSIBLE, NAMELY FROM INSIDE THE CARTRIDGE OUTWARDS.



AFTER USE NEVER PLACE IT BACK IN CLOSED PLASTIC BAGS OR CONTAINERS.

WARNING: IF DURING FILTERING FLUID FLOW PROGRESSIVELY DECREASES AND STOPS, CHECK THAT THE "VACUUM" SWITCH IS TURNED ON "MAX" (REF. B). IF THERE IS STILL NO FLOW, IT MEANS THAT THE CARTRIDGE IS CLOGGED AND IT HAS TO BE REMOVED AND WASHED.

TWO OR MORE TANDEM FILTERS CAN BE USED IN SERIES ARRANGEMENT (FIG.2). BY DOING SO IT WILL BE POSSIBLE TO HAVE "GROSS" AS WELL AS "FINE" FILTERING AT THE SAME TIME.

È POSSIBILE UTILIZZARE DUE O PIÙ FILTRI TANDEM COLLEGATI IN SERIE (FIG. 2). CIÒ PERMETTE, PER ESEMPIO, DI EFFETTUARE UNA FILTRAZIONE DI TIPO SGROSSANTE E FINE CONTEMPORANEAMENTE.

ON PEUT UTILISER DEUX OU PLUSIEURS FILTRES "TANDEM" MIS EN SERIE (FIG.2). CELA PERMET, PAR EXEMPLE, D' EFFECTUER SIMULTANÉMENT UNE FILTRATION DU TYPE "DEGROSSISSEUSE" ET "FINE".

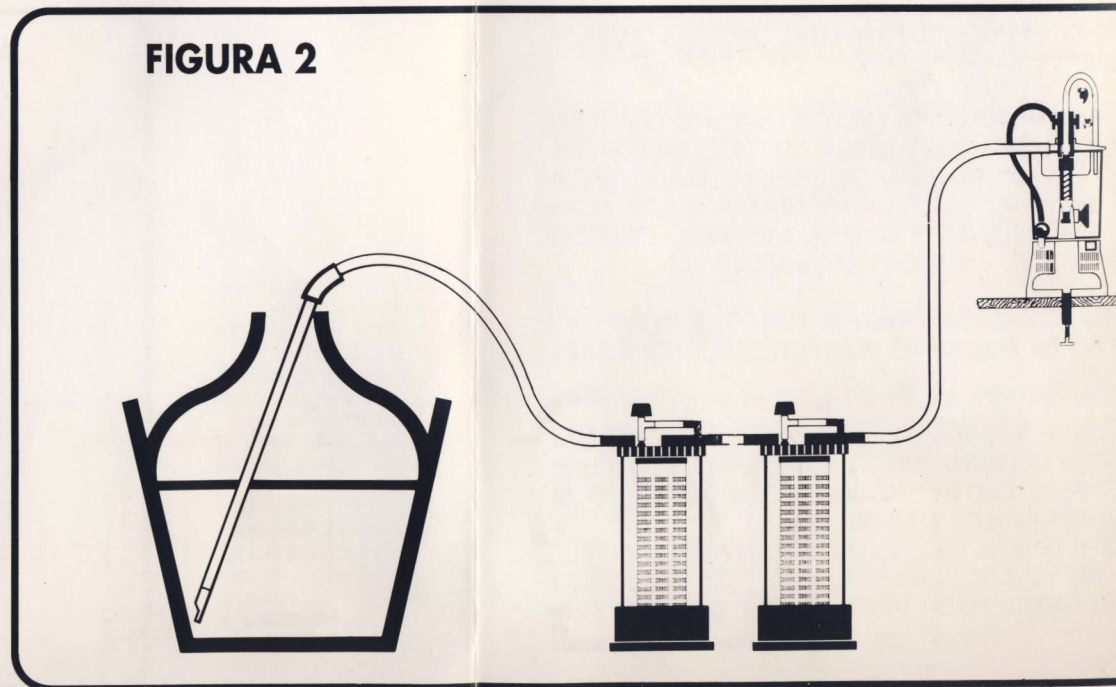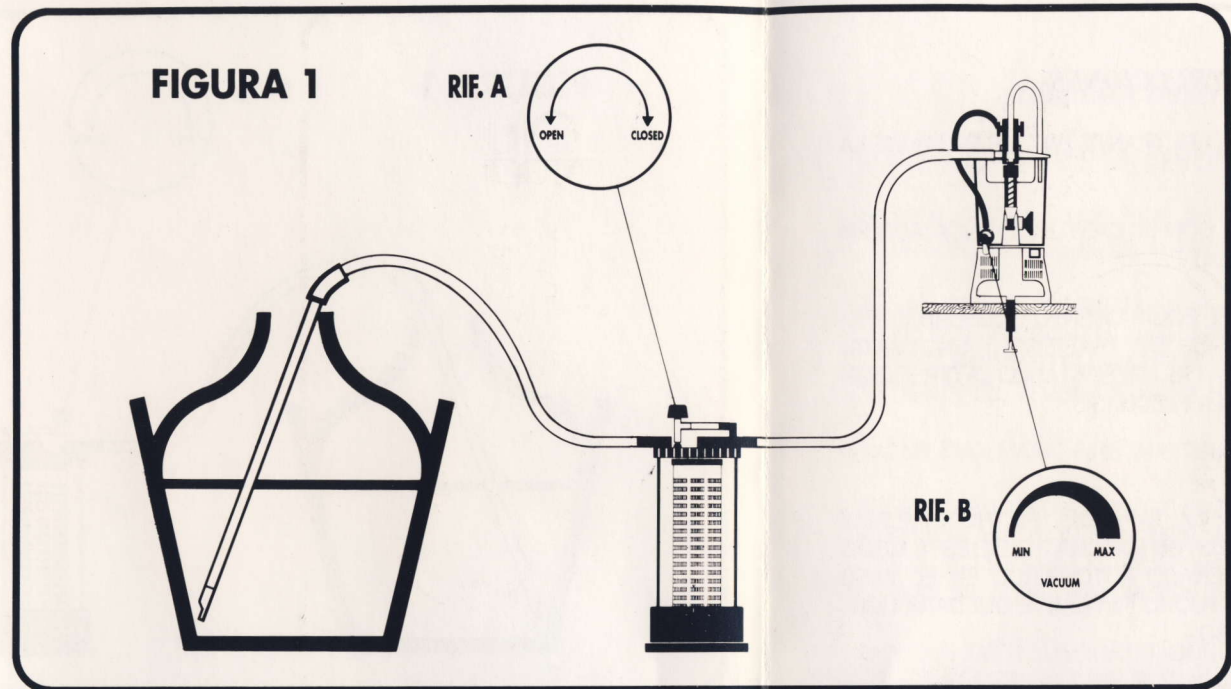

Open the bypass valve to begin using the filter housing. This is the most common mistake for new users. (this is called a 'faucet' in the instructions.) You must first fill the housing with wine and this is done by opening the bypass valve. Once the housing is full and wine is coming out of the nozzle, close the bypass and the wine will be pulled thru the filter.

If you have trouble using the filter--

1. Always remove the filter housing from the system and make sure the Enolmatic itself is operating.
2. Vacuum to max.
3. Put housing back and do not use the filter cartridge.
4. If housing does not fill, begin at the outlet of Tandem housing, remove tubing and check for suction. You **MUST** have a bottle under the nozzle to do this.
5. Continue checking at every point to find source of the air leak or (very unlikely) blockage.